


P.I.3 strand carrier rope

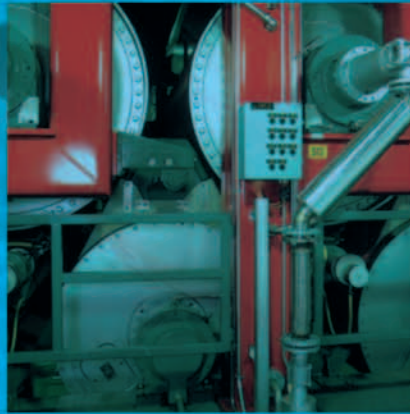

- P.I. (Patented Interstranded) manufacturing process to assure even tension in all individual yarns.
- Round cross section is maintained under load.
- Superior tail carrying and threading properties.
- Easily spliced using the William Kenyon® “rolling” splice.
- Pre-stretched and heat set for maximum stability.
- Available with blue, red or green color markers for inside/middle/ outside rope position identification.

William Kenyon®

Your Single Source for Paper Machine Threading®

William Kenyon®

Your Single Source For Paper Machine Threading®


PI. THREE STRAND CARRIER ROPE

Paper Machine Threading Ropes


A worldwide industry standard. The only true carrier rope that has been specifically engineered for paper machine threading systems offering a balance of performance, durability and ease of use.

Available with:


- Blue, red or green cover
- Blue, red or green marker
- Blue, red or green strand

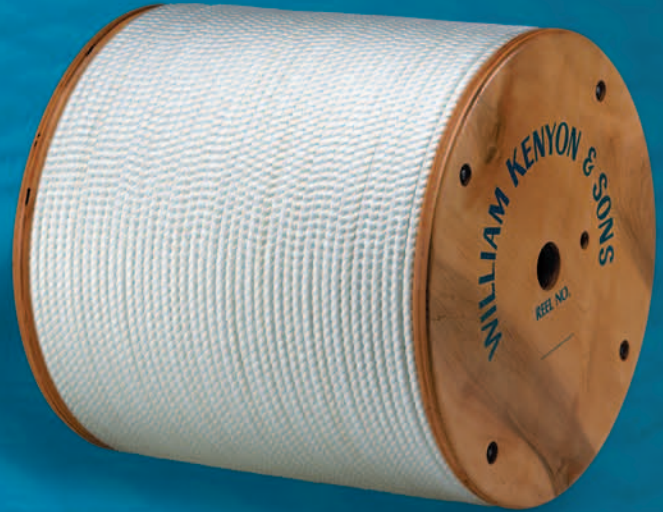


Cover



Marker



Strand



PI. THREE STRAND CARRIER ROPE


Style	Diameter Inches	Diameter Millimeters	Approx. Break Strength		Standard Stock Length	
			LBS.	KGF.	Feet	Meters
PI. spun	5/16"	8mm	2,700	1,225	5,000	1,524
	3/8"	10mm	3,400	1,542	5,000	1,524
	7/16"	11mm	3,900	1,769	5,000	1,524
	1/2"	12mm	5,600	2,540	5,000	1,524
	9/16"	14mm	7,200	3,266	5,000	1,524
	5/8"	16mm	8,700	3,946	5,000	1,524

1st Section

- PI. "LE"
- PI. "LE" Impregnated
- PI. Spun
- PI. Spun Impregnated

2nd Section

- PI. "LE"
- PI. Spun

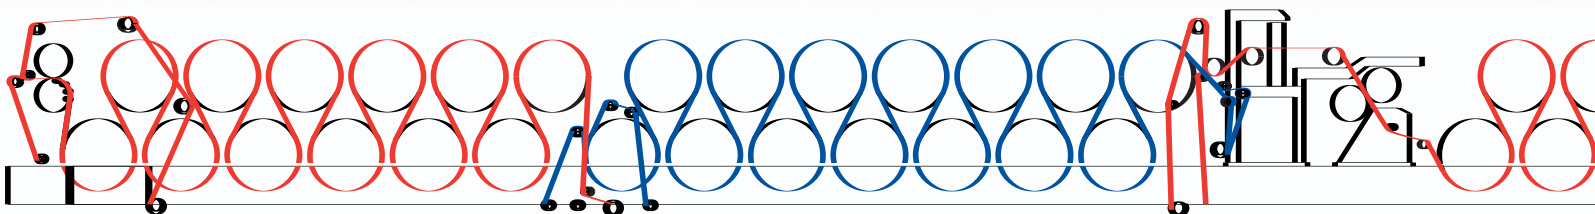

William Kenyon®

Your Single Source For Paper Machine Threading®

PI. THREE STRAND IMPREGNATED CARRIER ROPE

Paper Machine Threading Ropes


- All of the same superior properties of our standard P.I. Spun carrier rope with a proprietary impregnation, applied in yarn form, engineered to enhance abrasion and chemical resistance in size press and on and off machine coating applications.
- Available with blue, red or green color markers for inside/middle/outside rope position identification.



Red



Red Marker



PI. THREE STRAND IMPREGNATED CARRIER ROPE

Style	Diameter Inches	Diameter Millimeters	Approx. Break Strength		Standard Stock Length	
			LBS.	KGF.	Feet	Meters
P.I. spun impregnated	5/16"	8mm	2,700	1,225	5,000	1,524
	3/8"	10mm	3,400	1,542	5,000	1,524
	7/16"	11mm	3,900	1,769	5,000	1,524
	1/2"	12mm	5,600	2,540	5,000	1,524
	9/16"	14mm	7,200	3,266	5,000	1,524
	5/8"	16mm	8,700	3,946	5,000	1,524

Size Press/Coater

- P.I. Spun
- P.I. Spun Impregnated
- P.I. "LE"
- P.I. "LE" Impregnated

Calendar Stack


P.I. "LE"

Coater

- P.I. Spun
- P.I. Spun Impregnated
- P.I. "LE"
- P.I. "LE" Impregnated

Reel

- P.I. Spun
- P.I. "LE"

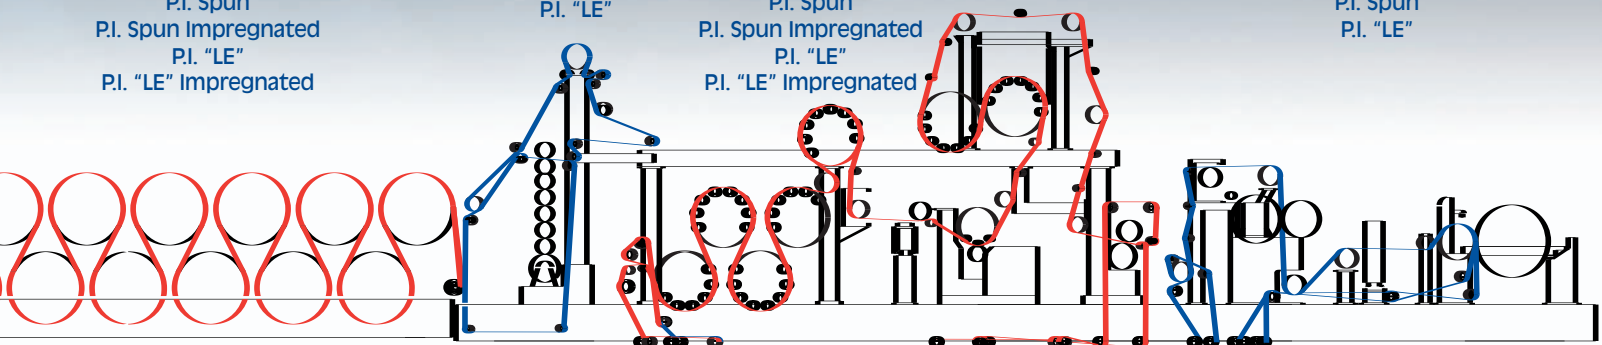

William Kenyon®


Your Single Source For Paper Machine Threading®

P.I. THREE STRAND "LE" CARRIER ROPE



Paper Machine Threading Ropes

- Specifically designed for sections where elongation due to moisture or insufficient take-up is a problem.
- 30% to 40% lower elongation than standard three strand.
- The preferred choice in coater and size press sections with independently driven ropes.


Available with:



Blue, red or green double color markers for inside/middle/outside rope position identification.



A proprietary impregnation, applied in yarn form, engineered to enhance abrasion and chemical resistance in size press and on and off machine coating applications.

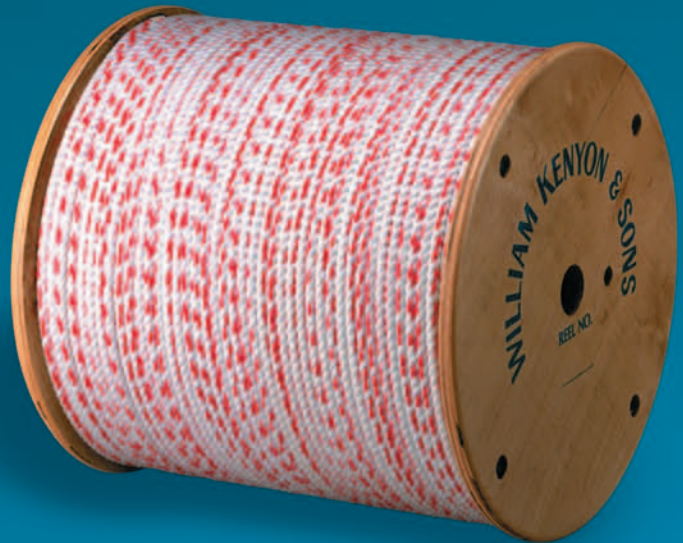

P.I. THREE STRAND "LE" CARRIER ROPE

Style	Diameter Inches	Diameter Millimeters	Standard Stock Length	
			Feet	Meters
P.I. spun "LE" Non-impregnated/ impregnated	5/16"	8mm	5,000	1,524
	3/8"	10mm	5,000	1,524
	7/16"	11mm	5,000	1,524
	1/2"	12mm	5,000	1,524
	9/16"	14mm	5,000	1,524
	5/8"	16mm	5,000	1,524

William Kenyon & Sons, Inc.
90 Ethel Road West
Piscataway, NJ USA 08854-5929
Tel: 800-371-5010 Fax: 800-995-3054

William Kenyon®
www.williamkenyon.com

William Kenyon, Inc.
585 Cabana
Granby, QC., Canada, J2G 1P8
Tel: 450-378-3141 Fax: 450-378-0526