

kenbraid carrier rope



Kenbraid Whitespun – 100% Spun Nylon

A general application braided rope constructed of 100% spun nylon giving both low tensile strength and good abrasion resistance.

KenBlend – Polyester/Nylon Blend

A blend of materials offering the heat and shrink resistance of filament polyester and the abrasion resistance and lower tensile strength of spun nylon.

KenMix – Filament/Spun Nylon Blend

A blend of filament and spun yarns offering the abrasion resistance of filament nylon and the lower tensile strength of spun nylon.

Ultra – 100% Filament Coated

A specialty braided rope constructed with coated yarns giving superior performance in high speed coater and size press sections and any position with an independent rope drive. (Available in single braid and with a center core to maintain round cross section.)

Kenbraid Specialty Braided Carrier Rope

A specialty coated, braided, carrier rope engineered for demanding applications on medium, sack and board machines in all sections especially size press and coater sections.

William Kenyon®

Your Single Source for Paper Machine Threading®


William Kenyon®

Your Single Source For Paper Machine Threading ®


KENBRAID EASI-SPLICE® CARRIER ROPE

Paper Machine Threading Ropes

- Easily spliced using the William Kenyon® basket Fid.
- Color markers available for inside/middle/outside rope position identification
- Prestretched and heat set for maximum stability.

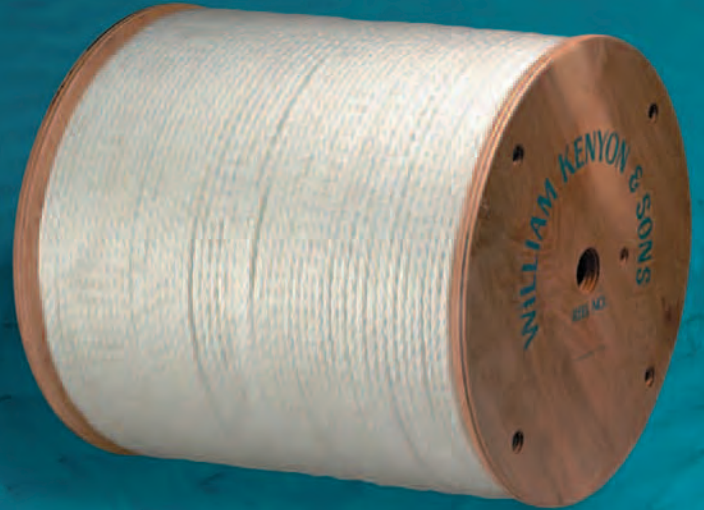

Red Marker



Blue Marker



KENBRAID EASI-SPLICE® CARRIER ROPE


Style	Diameter Inches	Diameter Millimeters	Approx. Break Strength		Standard Stock Length	
			LBS.	KGf.	Feet	Meters
Whitespun	3/8"	10mm	3,200	1,451	2,500	762
	1/2"	12mm	5,300	2,405	2,000	610
PN KenBlend	3/8"	10mm	2,700	1,225	2,500	762
	1/2"	12mm	4,300	1,950	2,000	610
KM KenMix	3/8"	10mm	4,500	2,041	2,500	762
	1/2"	12mm	5,600	3,175	2,000	610

1st Section

Whitespun
KenBlend
KenMix
Kenbraided Filament/Spun
Ultra Without Core

2nd Section

Whitespun
KenBlend
KenMix
Kenbraided Filament/Spun
Ultra Without Core

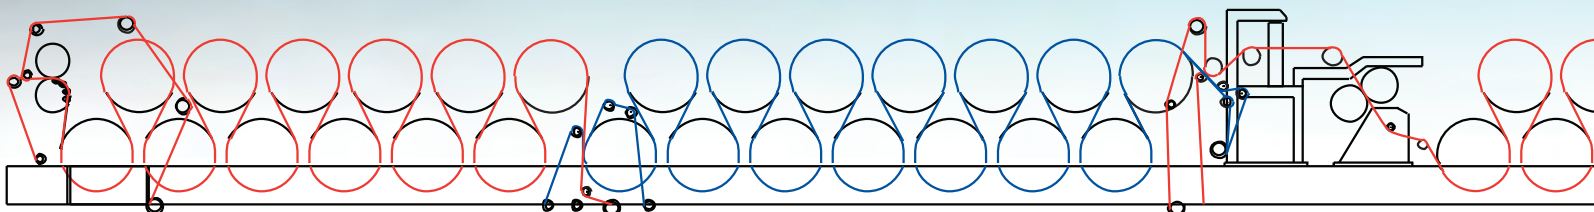


William Kenyon®

Your Single Source For Paper Machine Threading®


KENBRAID ULTRA CARRIER ROPE

Paper Machine Threading Ropes


- Manufactured with engineered impregnated yarns for high wear applications, i.e. size press sections and on and off machine coaters.
- Pre-stretched and heat set for maximum stability.
- Available in a variety of colors for inside/middle/outside rope position identification.
- Easily spliced using the William Kenyon® basket Fid.

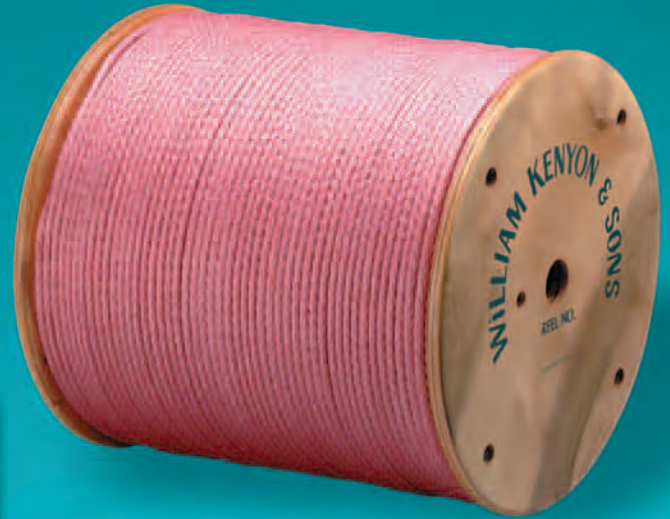

Red



Blue



Green



ULTRA BRAIDED CARRIER ROPE

Style	Diameter Inches	Diameter Millimeters	Approx. Break Strength		Standard Stock Length	
			LBS.	KGf.	Feet	Meters
Ultra Filament Coated	3/8"	10mm	3,969	1,800	2,500	762
	7/16"	11mm	5,072	2,300	2,000	610
	1/2"	12mm	5,513	2,500	2,000	610
Ultra Filament Coated (with core)	3/8"	10mm	4,630	2,100	2,500	762
	7/16"	11mm	6,174	2,800	2,000	610
	1/2"	12mm	6,615	3,000	2,000	610

Size Press/Coater

Ultra With Core
Kenbraid Filament
Kenbraid Filament/Spun

Calendar Stack


Ultra With Core
Kenbraid Filament

Coater

Ultra With Core
Kenbraid Filament
Kenbraid Filament/Spun

Reel

Whitespun
KenMix
KenBlend

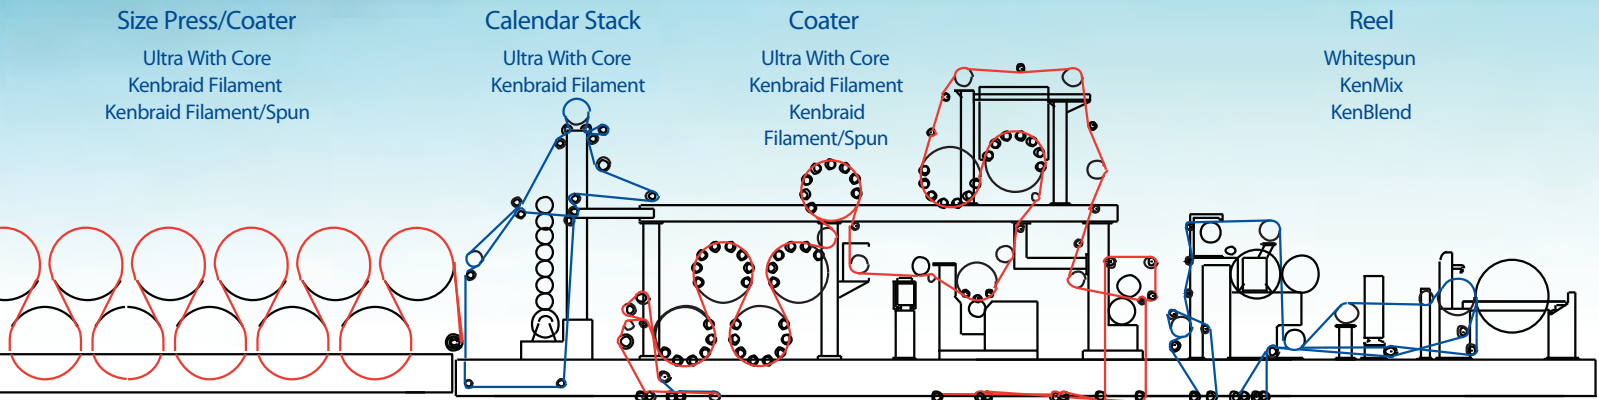

William Kenyon®


Your Single Source For Paper Machine Threading®

KENBRAID SPECIALTY BRAIDED CARRIER ROPE

Paper Machine Threading Ropes

Kenbraid Select - 100% Filament

- The abrasion resistance of 100% filament nylon is enhanced by the application of an engineered coating also minimizing the absorption of size, coating, water and wash-up chemicals.

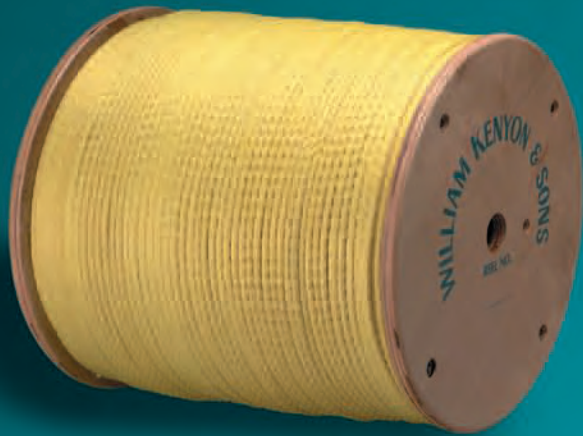

100% Filament - Coated Rope




Kenbraid Choice - Spun/Filament

- The abrasion resistance of filament nylon coupled with the low tensile strength of spun nylon both of which are enhanced by the application of an engineered coating to minimize absorption of size, coating, water and wash-up chemicals.



Spun/Filament - Coated Rope



KENBRAID SPECIALTY BRAIDED CARRIER ROPE

Style	Diameter Inches	Diameter Millimeters	Approx. Break Strength		Standard Stock Length	
			LBS	KGF	Feet	Meters
Kenbraid Filament Coated	3/8"	10mm	3,969	1,800	2,500	762
	7/16"	11mm	5,072	2,300	2,000	610
	1/2"	12mm	5,513	2,500	2,000	610
	5/8"	16mm	7,040	3,200	1,500	457
Kenbraid Spun Filament Coated	3/8"	10mm	3,300	1,500	2,500	762
	7/16"	11mm	4,400	2,000	2,000	610
	1/2"	12mm	5,060	2,300	2,000	610
	5/8"	16mm	6,600	3,000	1,500	457

William Kenyon & Sons, Inc.
90 Ethel Road West
Piscataway, NJ, USA, 08854-5929
Tel: 800-371-5010 Fax: 800-995-3054

William Kenyon®
www.williamkenyon.com

William Kenyon, Inc.
585 Cabana
Granby, QC., Canada, J2G 1P8
Tel: 450-378-3141 Fax: 450-378-0526